
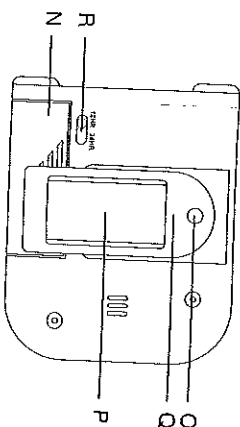



- A. Timer 1 Channel Button
- B. Timer 2 Channel Button
- C. Timer 3 Channel Button
- D. Timer 4 channel Button
- E. LCD Display
- F. AM/PM Indicator for Clock
- G. Hour Time Set Button
- H. Minute Time Set Button
- I. Second Time Set Button
- J. Clear Button
- K. Clock Button
- L. Start/Stop/Memory Button
- M. T1, T2, T3, T4 Indicator for Timer Channel
- N. Battery Cover
- O. Hanging Hole
- P. Magnet
- Q. Clip
- R. 12/24HR Switch

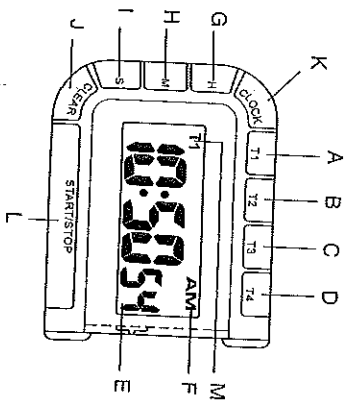

**1. TO INSERT BATTERY**

Slide and open the battery door of the unit, inserts batteries by following the + and - polarity signs inside the battery compartment.

**2. HELPFUL HINTS ON USING CLOCK/TIMER**

- Timing Capacity - Timer channels time from 1 second to 99 hours, 59 minutes, 59 seconds in both the count down and count up/stopwatch modes.
- In count down timer mode, the alarm will sound for 1 minute at the end of the cycle. Press Start/Stop button to turn the alarm off. If the alarm is not turned off, it will stop beeping after one minute to save battery life. Time will begin to count up when alarm sounds, so you know how much time has elapsed since time expired. If only one channel is selected and activated by depressing the Start/Stop button, its corresponding channel symbol will be shown in display. If all channels are activated with the Start/Stop button, T1, T2, T3 and T4 will be shown. The flashing timer channel symbols indicate that the other channels are operating. Press individual timer channel button to display actual time in channel. The clock function is independent of the timing channels.

**3. TO SET CLOCK**

- Press and hold "CLOCK" button for 3 seconds until the digits flash in display.
- Press "HR", "MIN", "SEC" buttons to set desired time.
- Press "CLOCK" button to start clock. The seconds will continue to count in the clock mode. The clock operates independent of the timer channels. Whenever the clock button is pressed, the time of day will appear in the display. If timers are operating, respective T1, T2, T3 or T4 will flash in the display.

**4. 12HR/24HR INTERNATIONAL TIME DISPLAY**

- Slide the 12HR/24HR switch to choose the desired display format.
- "AM" or "PM" will be displayed in the 12HR format.

#### 5. TO SET COUNT DOWN TIMERS

- Press Timer 1, Timer 2, Timer 3 or Timer 4 button for desired timing channel. The selected channel symbol will appear in display.
- Press individual **HR**, **MIN** or **SEC** buttons to program desired time. The numbers can be fast forwarded by holding individual buttons down for 2 seconds. If error is made in programming, press **CLEAR** button to zero the display.
- Press **START/STOP** button once to activate timer. Time will count down in seconds.
- When time expires, the alarm will sound and timer will begin to count up in seconds. Press **START/STOP** button to turn alarm off and stop countup. Each timer channel has its own distinctive alarm. Timer 1 has 1 repetitive beep, Timer 2 has 2 repetitive beeps, Timer 3 has 3 repetitive beeps and Timer 4 has 4 repetitive beeps. If not turned off, the alarm will automatically turn off in 60 seconds, however count-up timer continues to operate until **START/STOP** button is pressed. Press **CLEAR** button to reset display to zero.
- Follow the same procedure above for programming the other timer channels. All timer channels can be used at the same time. When using all timer channels, simply press the channel button to note count down time remaining. Solid channel symbol indicates the count-down time of the channel being displayed. Flashing channel symbols indicate other timer channels are in operation.

#### 6. TO STOP/RESTART OR CLEAR COUNT DOWN TIMERS

If you wish to stop timing function before time expires, press the correct timer channel button, then press **START/STOP** button once. To resume same timing period, press **START/STOP** button once again. If you wish to clear timer, press **START/STOP** button, then press **CLEAR** button which will reset display to zero.

#### 7. MEMORY RECALL

After time has expired and timer has been turned off, last countdown time will be recalled by pressing the **START/STOP** button.

#### 8. TO SET COUNT UP / STOPWATCH TIMER

- Press desired timer channel button. Then press **CLEAR** button to clear display.
- Press **START/STOP** button and time will begin to count up in 1 second intervals.
- To stop timing process, press **START/STOP** button. If you wish to restart timing process, press **START/STOP** button again.
- To turn timer off, press **START/STOP** button, then press **CLEAR** button. If count up/stopwatch timer is not turned off when it reaches 99 hours, 59 minutes, 59 seconds, the digits will continue to flash until pressing **START/STOP** button. Press **CLEAR** button to reset the timer to zero.

#### CARE OF YOUR PRODUCT

- Avoid exposing your timer to extreme temperature, water or severe shock.
- Avoid contact with any corrosive materials, such as perfume, alcohol, or cleaning agent.