

## What is the Hydrant Buddy?



The Hydrant Buddy is the industry's most powerful, lightweight tool designed to operate the following:

- Hydrants
- Gate Valves
- PIVs
- Sluice Gates
- Tapping

Hydrant Buddy is powered by a Milwaukee industrial motor and custom engineered gearbox, and weighs only 23 pounds.

## What are the safety benefits?

The Hydrant Buddy was developed in cooperation with Minnesota municipalities to reduce injuries, increase productivity, and reduce the cost of work. The Hydrant Buddy makes work easier and reduces the risk of the following injuries often associated with hydrant flushing:

- Rotator cuff tears and tendonitis
- Lower back strain and fatigue
- Tennis elbow



- Pinched spinal nerves
- Carpal tunnel
- Joint pain

## Why should I buy a Hydrant Buddy?


- 3-year comprehensive warranty on all parts.  
Simply pay for shipping and we will fix it for free.
- The Hydrant Buddy costs less than one injury payout.
- Significantly reduces the chance of 6 common injuries.
- Great customer reviews!



**For a short introductory Hydrant Buddy video, scan this QR code!**

## Kit Includes:

Hydrant Buddy  
Charger  
Rechargeable batteries (2)  
Adjustable 5-point socket  
Heavy duty storage  
Grease zerk  
Wrench  
Product instruction manual

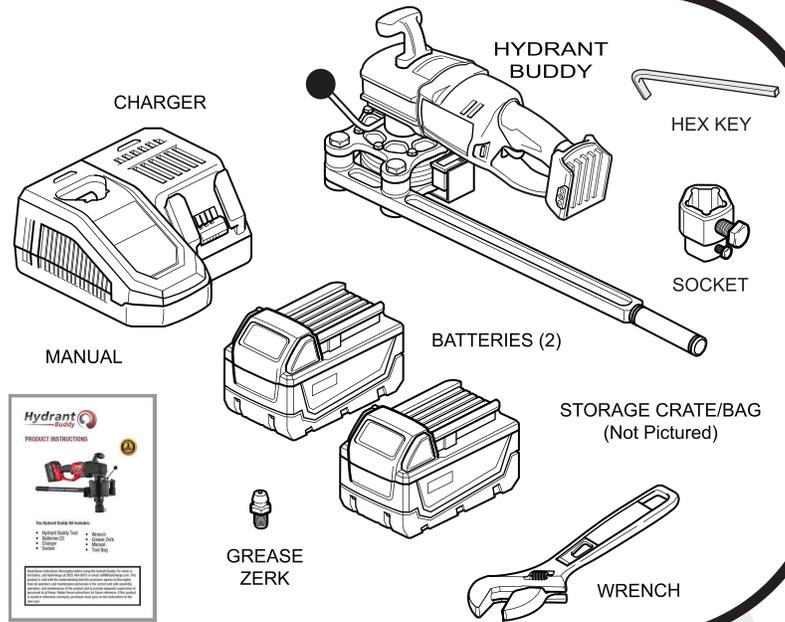

## Product Specifications

Width - 6.5 in

Length - 26 in

Height - 12 in from output drive to the top of the motor handle

Weight - 23 lbs (10.4 kg)

Torque - Up to 400 lbs-ft

Variable Speed - Up to 30 rpm

Battery Capacity - Up to 20 hydrants/  
10 gate valves

Battery Charge Time - 65 minutes

Distributor info here

## Additional Attachments


### Gate Valve Key

- Used to open gate valves.
- Attaches directly to the Hydrant Buddy.
- No adapter needed!
- 1-1/4" square telescopic tube made of painted steel.
- Weighing 16 lbs. or 26 lbs. boxed & shipped.
- The Gate Valve Key operates a 2" square nut.
- The drive portion of the key is a 3/4" square female.



Available in two different adjustable lengths, usually chosen depending on climate and gate valve depth.

GVK-S - 48" - 82" depth capacity  
GVK-L - 78" - 135" depth capacity

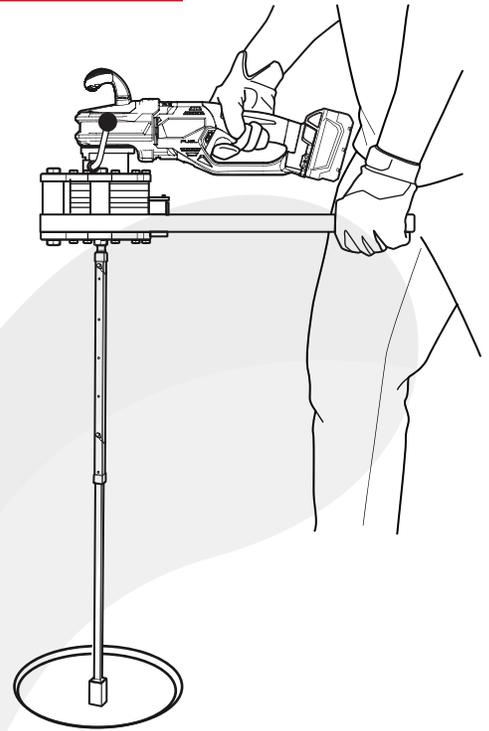

Watch a short tutorial of how the Gate Valve Key is used!



Scan Me!



### Additional Sockets

- Lightweight
- Black oxide plated steel
- Hex cap set screw on the socket itself for adjustable sockets



HBS-3A  
Adjustable  
3-point Socket




HBS-114  
1-1/4"  
4-point Socket





HBS-1M  
3/4" Female to  
1" Male Adapter

# Attachment Options

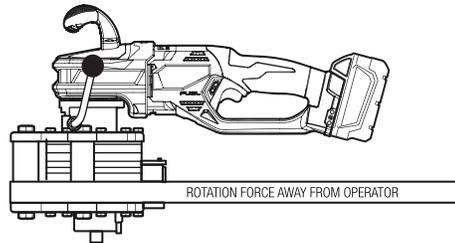

- |                                     |                                    |  |  |                                     |   |
|-------------------------------------|------------------------------------|--|--|-------------------------------------|---|
| GVK-L<br>78"-135"<br>Depth Capacity | GVK-S<br>48"-82"<br>Depth Capacity | HBS-5A<br>Adjustable<br>5-point Socket<br>(Included with Tool) | HBS-3A<br>Adjustable<br>3-point Socket | HBS-114<br>1-1/4"<br>4-point Socket | HBS-1M<br>3/4" Female to<br>1" Male Adapter |
|-------------------------------------|------------------------------------|--|--|-------------------------------------|---|



For the latest in Hydrant Buddy product news and insights, visit our website at [www.HydroVerge.com](http://www.HydroVerge.com) or scan the QR code below. For more information, call HydroVerge at (952) 484-8610 or email [info@HydroVerge.com](mailto:info@HydroVerge.com).

