


LD-8 WATER LEAK DETECTOR

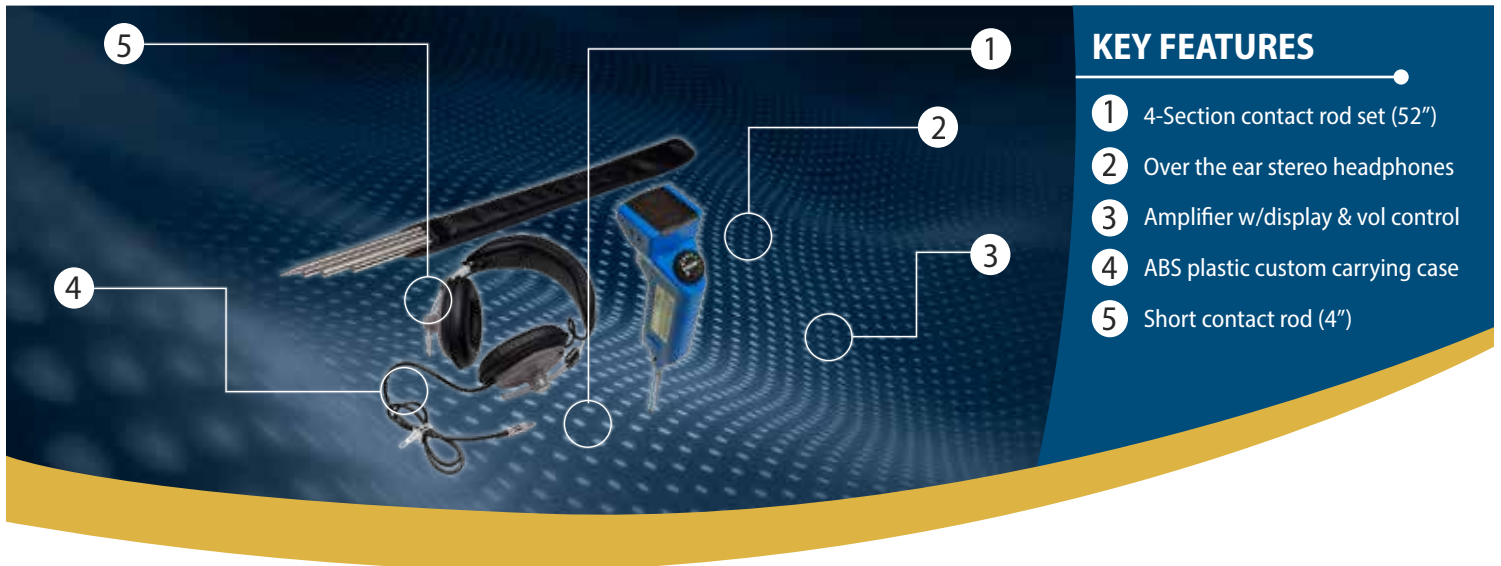

KEY FEATURES

- 1 4-Section contact rod set (52")
- 2 Over the ear stereo headphones
- 3 Amplifier w/display & vol control
- 4 ABS plastic custom carrying case
- 5 Short contact rod (4")

FEATURES

- ▷ Amplifier with push button ON/OFF switch, volume control, two-digit display of loudness, and three-range sensitivity switch.
- ▷ Use the short contact rod for listening at hydrants.
- ▷ Use the long contact rods for listening at below-grade meters and below-grade valves.
- ▷ Notch filters reduce A/C hum from transformers, power lines, etc.
- ▷ Excellent sensor sensitivity, leak sound amplification, and audio clarity.
- ▷ Stereo headphones with soft leather ear covers are comfortable for hours and hours.
- ▷ Use the two-digit display to compare the loudness of leak sounds at nearby locations, like adjacent water meters, close water hydrants, close water valves, etc. The display can show which is loudest when your ears can not tell.
- ▷ Sturdy, light-weight carrying case weighs only 10 lbs. and fits behind the seat in the truck.

SPECIFICATIONS

AMPLIFIER

- ▷ Sensor: Piezoelectric Element
- ▷ Amplification: 55 dB
- ▷ Frequency Range: 100Hz to 2000Hz
- ▷ Notch Filters: 150Hz and 180Hz
- ▷ Temperature Range: 25° F to 130° F
- ▷ Batteries: Two AA (dry cell or rechargeable)
- ▷ Battery Life: 24 hours minimum (alkaline cells)
- ▷ Weight: 10.6 ounces (with batteries)
- ▷ Size: 8.15" w x 3.3" h x 2.4" d

HEADPHONES

- ▷ Impedance: Stereo, 8 ohms

ABS CARRYING CASE

- ▷ Weight (full): 10 lbs (4.55 Kg)
- ▷ Size: 18" w x 12" h x 7" d (457mm x 304mm x 178mm)

STANDARD CONTACT RODS

- ▷ Short Rod: 4 inches, anti-slip tip
- ▷ 4-Section Rod Set: 52" in 4 sections, each 13" long, thread-connections

OPTIONAL CONTACT RODS

- ▷ 40 Inches Rod: Single piece, light-weight stainless steel
- ▷ 60 Inches Rod: Single piece, light-weight stainless steel



Includes:

- ▷ ABS custom case
- ▷ Instruction manual



SubSurface Instruments, Inc. | 1230 Flightway Drive, De Pere, WI. 54115
toll free: 855.422.6346 | Website: www.ssilocators.com | email: info@ssilocators.com



Rev. 08/06/2019