

# STAINLESS STEEL CHAIN HOIST



**FREE  
SPARE SET  
OF LATCHES**

## Features

- Stainless Steel Type 304 Construction for Corrosion Resistance
- Fully Enclosed Gearing
- Fully Machined Lift Wheel
- Designed for Lifting or Pulling
- Minimal Load Lifting Effort
- Individual Test Certificate and Serial Number
- Forged Stainless Steel Hooks and Safety Latches
- Stainless Steel Hand & Load Chain
- Weather Proof Load Holding Brake
- All Gears and Shafts Run on Roller Bearings
- Stainless Steel Riveted ID Tags
- Low Headroom
- Food grade gearbox lubrication


OZSS030-5CH

**Standards - CE, ASME/ANSI B30.21, ASME/ANSI B30.16, AS1418.2**

**0.25, 0.5, 1T**

**2, 3T**

**5T**

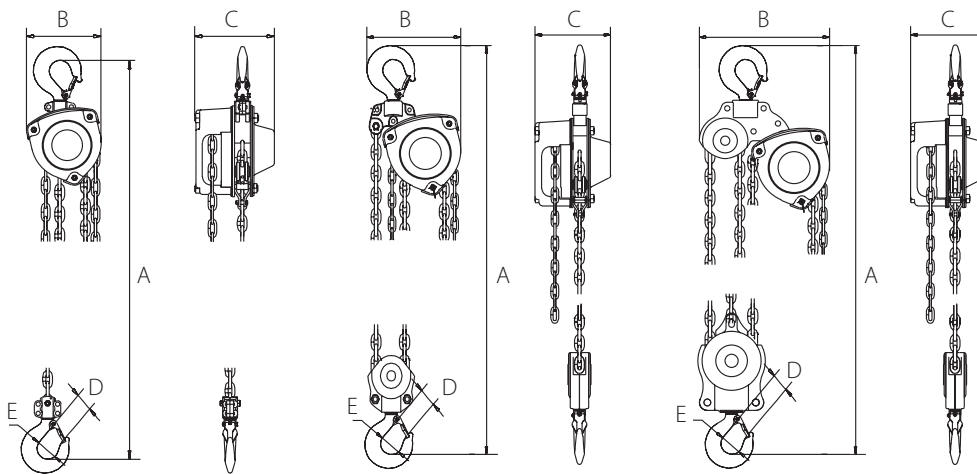

	OZSS0025-XXCH	OZSS005-XXCH	OZSS010-XXCH	OZSS020-XXCH	OZSS030-XXCH	OZSS050-XXCH
Capacity (tons)	0.25	0.5	1	2	3	5
Falls of Chain	1	1	1	2	2	3
Effort to Lift S.W.L (lbs)	45	67	67	74	74	74
Loadchain Diameter (mm)	4x12	7x21	7x21	7x21	9x27	9x27
Dimensional Information (in)	A	9.84	14.8	14.8	16.73	22.24
	B	4.29	6.77	6.77	7.56	9.06
	C	4.13	5.94	5.94	5.94	6.81
Hook-opening, upper & lower	D	1.06	1.02	1.02	1.33	1.53
	E	1.26	1.57	1.57	1.96	2.16
Net Weight of Head Only (lbs)	8.82	16.3	16.3	22.9	34.7	66.1

**Standard Lift: 10, 15, 20, 30 ft. We also do custom rigging**

Dimensions and illustrations are for reference only and subject to change without notice.  
XX in hoist model number indicates length of lift by foot.



**WARNING  
CANCER AND REPRODUCTIVE HARM**  
Some products may contain chemicals known  
to the state of California to cause cancer,  
or birth defect or reproductive harm.  
[www.PSSWarning.ca.gov](http://www.PSSWarning.ca.gov)

