

Graphite Lubricant

Product # 336

High-temperature dry lubricant

This high-grade, dry graphite liquid is designed to eliminate friction and protect high-use equipment. It's a durable, heavy-duty lubricant that can endure extreme temperatures up to 900°F. It dries quickly and sheds moisture to prolong the working life of equipment and machinery.

Use on:

- Cast Iron
- Steel Alloys
- Conveyors and Rollers
- Copper
- Brass
- Titanium
- NOTE: May harm painted or waxed surfaces.

Features and Benefits

- Offers long-term protection, even when exposed to steam, damp atmospheres and salt spray.
- Protects metal parts under sustained temperatures up to 2100°F.
- Acts as a sealant, reduces friction and makes tighter, firmer joints.

Properties

Appearance.....	Black liquid
Fragrance.....	Solvent
Ready to use.....	Yes
Specific gravity.....	0.85
Flash point.....	130°F
Stability.....	1 year

Directions

Complete directions on product label
Clean surface of oil, grease and soils. Use with grease or gun pressure pump.

NOTE: May harm painted or waxed surfaces. Always test in an inconspicuous area before using.

Ingredients

Hydrotreated Light Alkaness.....
Alkanes, C14-16.....
Hydrotreated Heavy Alkanes.....
Graphite.....

CAS Number

64742-47-8
90622-46-1
64742-52-5
7782-42-5


Safety

DANGER: Flammable liquid and vapor. May be fatal if swallowed and enter airways.

DOT Shipping (ground transportation)

Proper Shipping Name:	Flammable liquids, n.o.s.
Class:	3
ID Number:	UN1993
Package Group:	III

NFPA® RATINGS

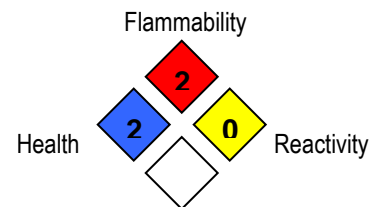

Quantities

- 30, 35 & 55 gallon
- 5 or 6 gallon
- 6x1 gallon
- 4x1 gallon