




CITGO® HyDurance® AW Fluids

OVERVIEW




- Superior anti-wear hydraulic and circulating oils specially formulated to offer excellent service in high-pressure, high-output industrial hydraulic circuits.
- Chemically stable with excellent resistance to sludge formation. Exhibit excellent protection and filterability.

FEATURES & BENEFITS



- Formulated with high-quality base stocks and premium additive components.
- Thermal stability for superior resistance to heat-related sludging in sensitive electro-hydraulic servos.
- Good hydrolytic stability means they will not contribute to the formation of metal-etching acids or corrosive reactants.
- Inhibited against rusting in both fresh and sea water, passing both A and B Procedures of the ASTM D665 Rust Test.
- Excellent anti-wear protection to pumps, motors, valves, and other hydraulic circuit components. Approved against stringent equipment performance requirements.
- Resistant to foaming and will not foster abnormal air entrainment in properly designed hydraulic circuits.
- Superior demulsibility to readily separate water, permitting draining of contaminating water from circulating systems.
- Premium performance in wet and dry filterability testing.


APPLICATIONS




- Recommended for service in industrial and mobile hydraulic systems when used in accordance with equipment manufacturers' recommendations.
- Designed to provide enhanced service life to vane, piston, and gear pumps as well as other circuit components such as motors and servos.
- Recommended for use as a gear and bearing lubricant in industrial applications where rust- and oxidation-inhibited oils are required.
- Meet or exceed the following manufacturer specifications:

ASTM D6158 HM	General Motors LS-2
Fives Cincinnati P-68, 69, 70	JCMAS HK P041
Parker Denison HF-0	ISO 11158 HM
DIN 51524-2	SEB 181 222
Eaton Brochure 03-401-2010	US Steel 126, 127, 136
Bosch Rexroth RDE-90235	


Parker Denison HF-0 Thermal Stability

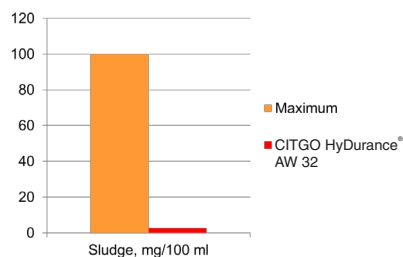


V104C Vane Pump Wear Data

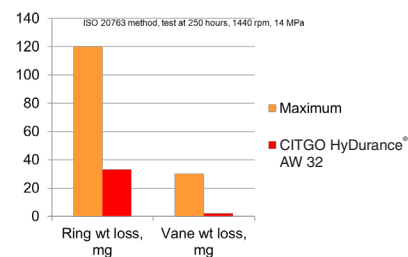


Parker Denison HF-0 Demulsibility

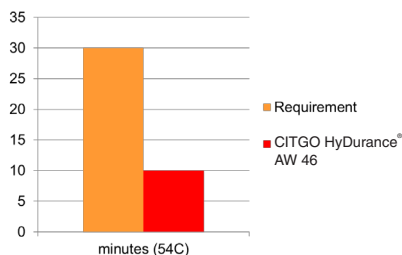

Parker Denison HF-0 Filterability

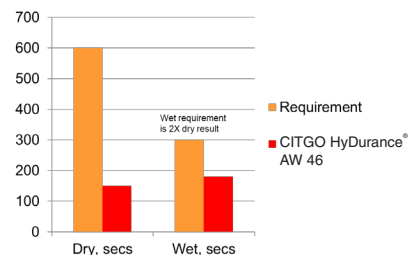

PROPERTIES



Typical Properties for CITGO HyDurance AW Fluids:

Grade	22	32	46	68	100	150
Material Code	633606001	633607001	633608001	633609001	633610001	633611001
Gravity, ASTM D4052, °API	33.7	32.6	31.2	30.8	28.6	29.3
Density, lb/gal	7.13	7.18	7.24	7.26	7.36	7.33
Flash Point, ASTM D92, °F (°C)	399 (204)	417 (214)	446 (230)	468 (242)	471 (244)	500 (260)
Viscosity						
cSt at 40°C	223	32.3	46.6	68	98	149
cSt at 100°C	4.45	5.59	6.96	9.0	11.1	14.8
Viscosity Index	110	111	106	107	98	99
FZG (A/8.3/90), pass load, ISO 14635-1	12	12	12	12	12	12
Pour Point, ASTM D97, °F (°C)	-40 (-40)	-40 (-40)	-36 (-33)	-36 (-33)	-36 (-33)	-31 (-24)
Color, ASTM D1500	L0.5	L0.5	L0.5	L0.5	L3.0	L2.5
Water Separability, ASTM D1401 ⁽¹⁾	40-40-0	40-40-0	40-40-0	40-40-0	40-40-0	40-40-0
Oxidation Test, ASTM D943, Hrs.	6000	6000	6000	5000	4000	2850
Rust Test ASTM D665 A, B ⁽²⁾	Pass	Pass	Pass	Pass	Pass	Pass
Meets Fives Cincinnati Requirement	—	P-68	P-70	P-69	—	—
AFNOR NF E 48-603	HM22	HM32	HM46	HM68	HM100	HM150
ISO VG No.	22	32	46	68	100	150

Notes: (1) 30 minutes max. separation time to ≤3ml emulsion. Test temperature is 130°F for grades up through ISO 68. Test temperature is 180°F for ISO 100 and 150.

(2) Pass - No Rust.(2) Procedure A (distilled water)

CITGO and HyDurance are registered trademarks of CITGO Petroleum Corporation. All other registered trademarks or trademarks are the property of their respective owners. Values shown are typical values only and do not constitute a specification. The information contained herein is subject to change without notice.