



# DRUM/BARREL PUMPS DRUM PUMP NOZZLES




## Capability

Max operating pressure:	65 psi (4.5 bar)
Max temperature:	160°F (71°C)
Max viscosity*:	1000cP
Max flowrate*:	24 GPM (91 LPM)

\*Varies with pump series & motor type

## Construction

- Unfilled polypropylene or PVDF
- FKM, EPDM, or Perlast o-rings
- Non-wetted 316 stainless steel spring

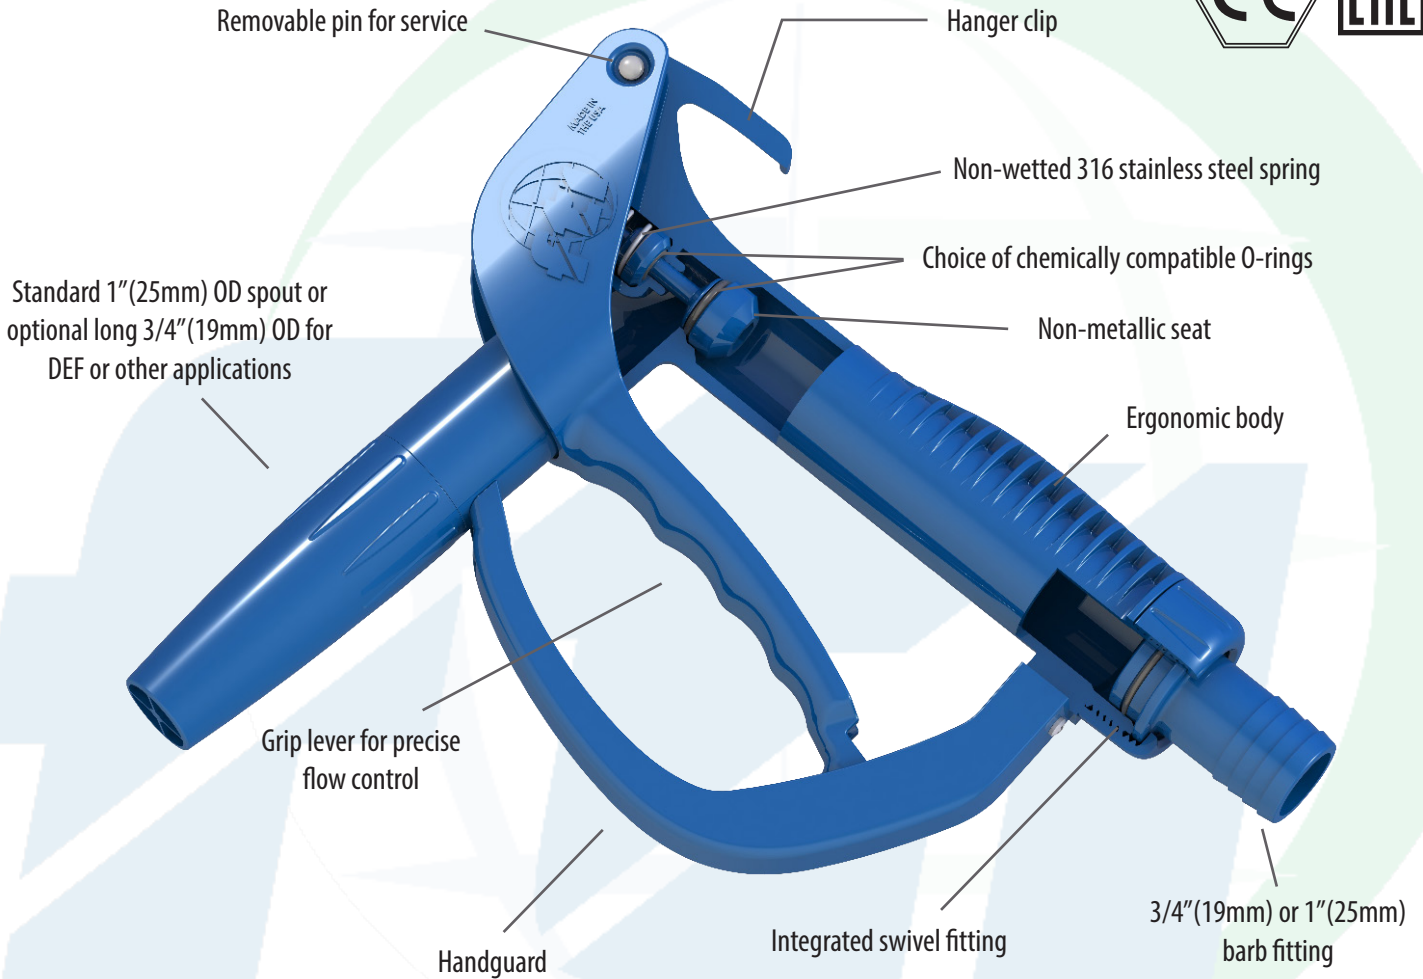

**MADE IN THE U.S.A.**

# NOZZLE OPTIONS & CONFIGURATIONS



SS Nozzles not manufactured in USA.

Description	Applicable Model	Part Number
Polypropylene squeeze lever control nozzle with 1" (25 mm) O.D. spout is ideal for corrosive & non corrosive fluids.		
1" Barb connection, SS hose clamp, wetted parts are PP & FKM	PF, TB, TT, SF	111030-1
1" Barb connection, SS hose clamp, wetted parts are PP & EPDM	PF, TB, TT, SF	111030-2
1" Barb connection, SS hose clamp, wetted parts are PP & Perlast®	PF, TB, TT, SF	111030-3
3/4" Barb connection, SS hose clamp, wetted parts are PP & FKM	EF	111030-7
3/4" Barb connection, SS hose clamp, wetted parts are PP & EPDM	EF	111030-8
3/4" Barb connection, SS hose clamp, wetted parts are PP & Perlast®	EF	111030-9
PVDF squeeze lever control nozzle with 1" (25 mm) O.D. spout is ideal for highly corrosive fluids.		
1" Barb connection, SS hose clamp, wetted parts are PVDF & FKM	PF, TB, TT, SF	111030-4
1" Barb connection, SS hose clamp, wetted parts are PVDF & EPDM	PF, TB, TT, SF	111030-5
1" Barb connection, SS hose clamp, wetted parts are PVDF & Perlast®	PF, TB, TT, SF	111030-6
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & FKM	EF	111030-10
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & EPDM	EF	111030-11
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & Perlast®	EF	111030-12
Polypropylene squeeze lever control nozzle with 3/4" (19 mm) O.D. long spout is ideal for corrosive & non corrosive fluids specifically DEF (Diesel Exhaust Fluid) vehicle reservoirs.		
1" Barb connection, SS hose clamp, wetted parts are PP & FKM	PF, TB, TT, SF	111030-13
1" Barb connection, SS hose clamp, wetted parts are PP & EPDM	PF, TB, TT, SF	111030-14
1" Barb connection, SS hose clamp, wetted parts are PP & Perlast®	PF, TB, TT, SF	111030-15
3/4" Barb connection, SS hose clamp, wetted parts are PP & FKM	EF	111030-19
3/4" Barb connection, SS hose clamp, wetted parts are PP & EPDM	EF	111030-20
3/4" Barb connection, SS hose clamp, wetted parts are PP & Perlast®	EF	111030-21
PVDF squeeze lever control nozzle with 3/4" (19 mm) O.D. long spout is ideal for highly corrosive fluids & containers that have small openings.		
1" Barb connection, SS hose clamp, wetted parts are PVDF & FKM	PF, TB, TT, SF	111030-16
1" Barb connection, SS hose clamp, wetted parts are PVDF & EPDM	PF, TB, TT, SF	111030-17
1" Barb connection, SS hose clamp, wetted parts are PVDF & Perlast®	PF, TB, TT, SF	111030-18
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & FKM	EF	111030-22
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & EPDM	EF	111030-23
3/4" Barb connection, SS hose clamp, wetted parts are PVDF & Perlast®	EF	111030-24
Aluminum squeeze lever control nozzle with 15/16" (24 mm) O.D. Spout is ideal for flammable & combustible fluids & for use with Static Protection kit threaded hoses.		
1" (25mm) FNPT connection, wetted parts are Aluminum, Brass & PTFE	PFS, TBS, TTS	J101929
3/4" (19mm) FNPT connection, wetted parts are Aluminum, Brass & PTFE	EFS	110374
304 Stainless Steel squeeze lever Auto Shut off nozzle with 3/4" (19 mm) O.D. Spout is ideal for corrosive & non corrosive fluids specifically DEF (Diesel Exhaust Fluid) vehicle reservoirs.		
1" (25mm) Barb connection, SS hose clamp, wetted parts are SS & FKM	PFS, TBS, SFS	107232
3/4" (25mm) Barb connection, SS hose clamp, wetted parts are SS & FKM	EFS	107231

Perlast® is a registered trademark of Precision Polymer Engineering Ltd.