Truflo #TF550

Fits Inside a 5¼" Valve Box!



- Fits inside a standard 5¼" valve box
- Alternative to two valve box blow-off
- Easy to maintain without digging
- Provides powerful "full channel flow"
- 2" MIP Outlet
- 2" FIP Vertical (Straight) Inlet












Kupferle
2511 North 9th Street
St. Louis, MO 63102
800-231-3990 / www.hydrants.com
Contact us at info@hydrants.com



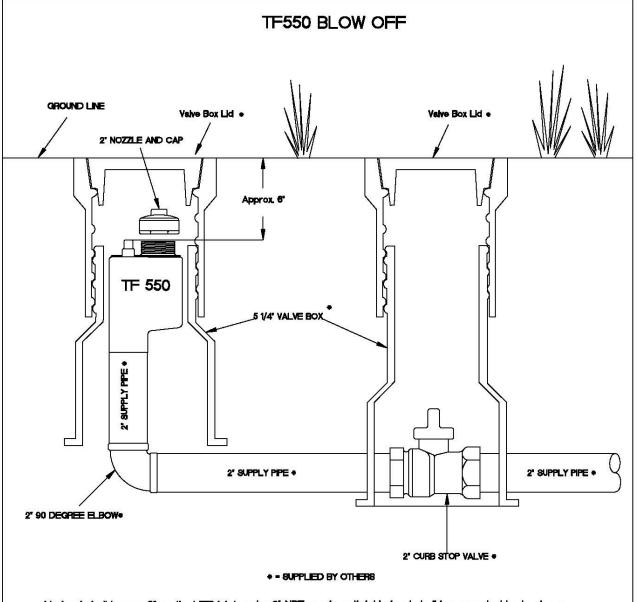

Hydrant shall have a 2" vertical FIP inlet and a 2" NPT nozzle outlet. Hydrant shall be operated by turning a top-mounted % a square nut counterclockwise to open, clockwise to close. All internal working parts, the inlet, and the outlet shall be brass. All working parts shall be serviceable from above with no digging required. All wear parts (o-rings and valve seat) shall be commonly available dimensions and materials, and none may be vendor-unique design. Hydrant shall be model TF550 as manufactured by Kupferly Foundry Co., St. Louis, Mo. 63102.

- -insure that the hydrant is tree to move vertically within the valve box in order to prevent the transmittion of traffice loads the to hydrant. It should not be jammed or wedged against the valve box ID.
- -The normal position of the top of the operating nit is about 6' below the top of the valve box. But you can freely adjust this position to suit your circumstances. Just keep in mind the maintanance procedures are best preformed when bolts attaching the top cap are within an easy reach.

