

Single Parameter Monitoring Panel with SC4500 and TU5300sc or TU5400sc

Applications

- Drinking Water
- Wastewater
- Food and Beverage
- Pharmaceutical
- Power Generation
- Semiconductor
- Field Use



Expertise + Simplicity

Quality from start to finish

Our panel configurations allow you to maximize the inherent quality of the instruments, providing peace of mind while leveraging Hach's 100 years of water quality innovations.

Up and running in no time

Our preassembled, ready-to-use solutions streamline the process between purchasing and startup.

Ease of installation

When you buy a water quality monitoring station from Hach, you'll receive an expertly designed, preassembled panel that makes installation straightforward and user friendly.

Technical Data*

Range Sensor Monitoring Option: TU5300sc 0 - 700 NTU/FNU/TE/F/ FTU

Controller SC4500

Mounting Wall or rack mounting

Sample Inlet Connection 1/4" OD tubing

Process Connection Sample drain: 1/4" OD tube or hose barb

Weight 13.8 kg / 30.5 lbs

Dimensions (H x W x D) 685.8 mm x 584.2 mm x 292.1 mm

Sample Temperature 2 - 60°C (35 - 140°F)

Sample Pressure 6 bar (87 psi) maximum, compared to air at sample temperature range from 2 - 40 °C (35.6 - 104°F)

Sample Flow Rate 100 - 1000 mL/min, optimal flow rate: 200 - 500 mL/min


Power Requirements

(Voltage) 100-240 VAC ±10%, 50/60 Hz; 1 A Solution Type Drinking water, raw and treated

*Subject to change without notice.

DOC053.53.35346.Dec24

Dimensions

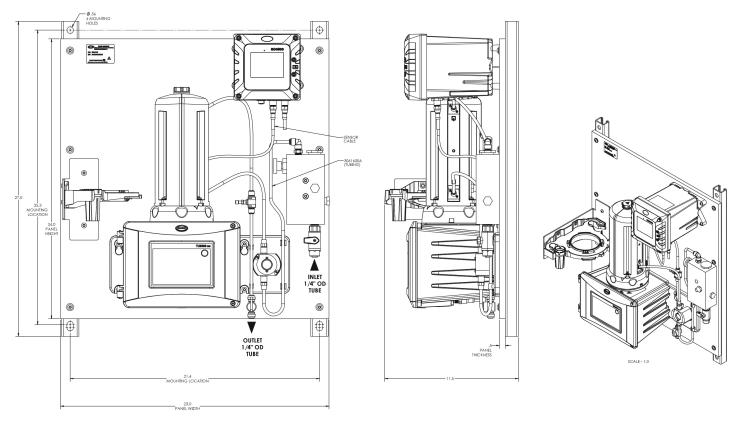

Order Information

Panel

SPMP-TU Single Parameter Monitoring Panel with SC4500 and TU5300sc **SPMP-TU5400** Single Parameter Monitoring Panel with SC4500 and TU5400



World Headquarters: Loveland, Colorado USA | hach.com

 United States
 800-227-4224
 fax: 970-669-2932
 email: orders@hach.com

 Outside United States
 970-669-3050
 fax: 970-461-3939
 email: intl@hach.com