




335 208-230V | PN 4042500

PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	350	233
Efficiency (P/kWh)	9.3	6.7
Energy Factor (L/kWh)	4.3	3.2

ELECTRICAL


°F %RH	80 60	80 60
Supply Voltage	230V	208V
Current Draw	6.9A	7.9A
MCA*	15A	15A
MOP*	20A	20A
Recommended Breaker Size	15A	15A
Power	1,565W	
Power Cord	NEMA 6-15P 	
CFM	900	
BTU (Total)	20,300	
BTU (Motor Load)	5,100	
BTU (Heat of Condensation)	15,200	

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R410a
Refrigerant Amount	4 lb 12 oz
Weight	215 lb
Air Filter MERV Rating	MERV-13
Dimensions	20" x 22" x 2"
Drain Port Connection	3/4 Threaded NPT
Operating Temperature	56 F Min - 95 F Max



DIMENSIONS

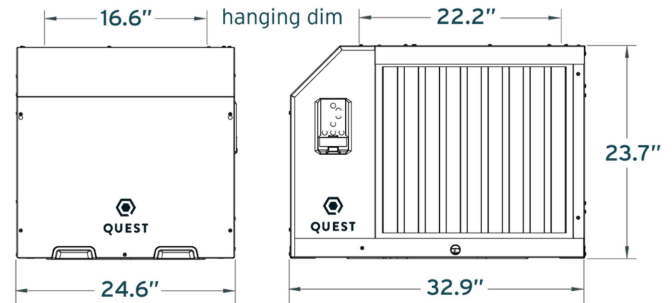

FEATURES

- + **Patented M-CoRR Technology:** Multi-coil design achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Superior MERV-13 Filtration:** Removes more harmful contaminants from the air, such as mold, bacteria and some viruses
- + **Integrated Hang Points** and handles allows for easy movement and flexible installation
- + **Filter Compensation Technology:** Accounts for static pressure change to ensure consistent, powerful airflow
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.

QUESTCLIMATE.COM / (877) 420-1330

